(19) World Intellectual Property Organization

International Bureau



(43) International Publication Date 16 June 2005 (16.06.2005)

PCT

(10) International Publication Number WO 2005/054581 A1

(51) International Patent Classification7:

E01F 9/018

(21) International Application Number:

PCT/NO2004/000366

(22) International Filing Date:

29 November 2004 (29.11.2004)

(25) Filing Language:

Norwegian

(26) Publication Language:

English

(30) Priority Data: 20035336

1 December 2003 (01.12.2003) NO

(71) Applicant (for all designated States except US): JU-RALCO A/S [NO/NO]; Postboks 129, N-1309 Rud (NO).


- (72) Inventors; and
- (75) Inventors/Applicants (for US only): HEGLUND, Kim

[NO/NO]; Vestre vei 81C, N-1315 Nesøya (NO). SKÖLD, Johnny [NO/NO]; Breidablikkveien 1, N-4250 Kopervik

- (74) Agent: ABC-PATENT, SIVILING. ROLF CHR. B. LARSEN A.S; Brynsveien 5, N-0602 Oslo (NO).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Continued on next page]

(54) Title: METHOD FOR PRODUCTION OF A MAST SHAPED BODY

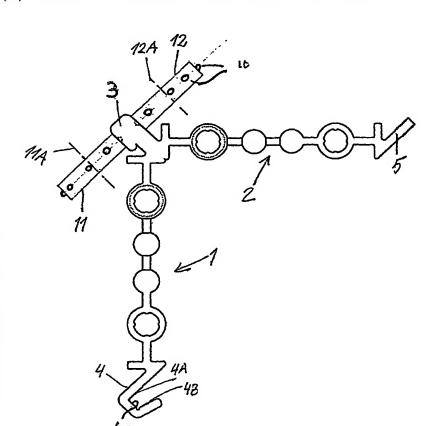

(57) Abstract: The invention relates to a method for production of masts mainly formed of extruded bodies and with a general cross section comprising at least three mast elements (1, 2) joined together at the corners (3) by means of cooperating rail sections (5) and channel sections (4). The channel section (4) are provided with tapered inner wall sections (4A, 4B) and the elements are joined by inserting the rail section (5) of a mast element (1, 2) into the channel section (4) of an adjacent mast element (1, 2), and clamped together by a substantial continuous movement of a roller like tool (11, 12) in longitudinal direction and on the external side of each side of the channel section (4), causing permanent deformation of the walls of the channel section (4) around the rail section (5), thereby establishing a permanently joined corner (3).

ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

with international search report

 before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.